

800G Twin-port 2x400Gb/s OSFP to 4x200Gb/s OSFP Breakout Active Copper Cable

Features

- Transmission data rate up to PAM4 106.25Gbps per channel
- Linear PAM4 programmable equalizer optimized for 56GBaud copper link up to max length 5M
- Enable Auto-Negotiation and Link Training
- Low latency<10ps
- Supports device programming by MCU with I²C
- Power consumption: 1.5 Watts max(OSFP-IHS) ,0.4Watts max(OSFP-RHS)
- OSFP Finned Top(IHS) to OSFP Flat Top(RHS)
- Operating case temperature 0-70°C
- Single 3.3V supply voltage
- Hot pluggable
- OSFP MSA Rev5.0, CMIS Rev5.0, IEEE802.3ck compliant

Applications

- 2x400Gb/s OSFP Ethernet switch to OSFP adapters

Description

O40112-800G-ACC is a high-speed active copper cabling solution designed for AI/HPC high-performance computing clusters and next-generation data center architectures, enabling high-density, low-latency interconnection between switches and servers. The product employs active signal conditioning and equalization technology to effectively compensate for high-speed electrical signal loss in short-distance transmission scenarios, ensuring high signal integrity and stable bit error rate performance. The ACC offers advantages such as lower power consumption, better cost-effectiveness, and plug-and-play deployment, enabling efficient and scalable computing network construction.

Absolute Maximum Specifications

Table1-Absolute Maximum Specifications

Parameter	Min.	Typical	Max.	Unit	Note
Storage Temperature	-40		+85	°C	
Operating Case Temperature	0		70	°C	
Supply voltage	-0.3	3.3	3.6	V	
Relative Humidity (non- condensing)	5		85	%	
Data Rate		800		Gbps	
Length	0.5		5	M	
AWG	32		26	AWG	
Jacket material	Braided Sleeve				

Electrical Specifications

Table2-Electrical Specifications

Parameter	Symbol	Min.	Typical	Max.	Unit
Power supply voltage	VCC	3.1	3.3	3.5	V

Input Amplitude		800		1200	mVpp
Input LOW Voltage	V _{IL}	-0.3		0.35*V _{CC}	V
Input HIGH Voltage	V _{IH}	0.65*V _{CC}		V _{CC} +0.3	V
Output Logic LOW	V _{OL}			0.25*V _{CC}	V
I ² C Master Mode Output Frequency			400		kHz
800G end Power consumption			1.2	1.5	W
200G end Power consumption			0.3	0.4	W

High-Speed Specifications

Table3-High-Speed Specifications

Parameter	Symbol	Min.	Typical	Max.	Unit
Raw cable impedance	Z _{ca}	90	100	110	ohm
Mated connector Impedance	Z _{mated}	85	100	115	ohm
Maximum insertion Loss at 26.56 GHz	SDD21	11		19.75	dB
Differential to common-mode return loss	SCD11/22	$RL_{cd}(f) \geq \begin{cases} 22 - 10(f/26.56) & 0.05 \leq f < 26.56 \\ 15 - 3(f/26.56) & 26.56 \leq f \leq 40 \end{cases}$ <p>For 0.05 ≤ f ≤ 40 GHz, Where f is the frequency in GHz</p>			dB
Differential to common-mode conversion loss	SCD21-SDD21	$Conversion_loss(f) - IL(f) \geq \begin{cases} 10 & 0.05 \leq f < 12.89 \\ 14 - 0.3108f & 12.89 \leq f \leq 40 \end{cases}$ <p>For 0.05 ≤ f ≤ 40 GHz, Where f is the frequency in GHz</p>			dB
Common-mode to common-mode return loss	SCC11/22	$RL_{cc}(f) \geq 1.8$ <p>For 0.05 ≤ f ≤ 40 GHz, Where f is the frequency in GHz</p>			
Minimum COM	COM	3			dB
Minimum cable assembly ERL	ERL	8.25			dB

OSFP Pin Definition

Table4-OSFP Pin Definition

Pin	Symbol	Description	Pin	Symbol	Description
1	GND	Ground	31	GND	Ground
2	Tx2p	Transmitter Non-Inverted Data Input	32	Rx2p	Receiver Non-Inverted Data Output
3	Tx2n	Transmitter Inverted Data Input	33	Rx2n	Receiver Inverted Data Output
4	GND	Ground	34	GND	Grounds
5	Tx4p	Transmitter Non-Inverted Data Input	35	Rx4p	Receiver Non-Inverted Data Output
6	Tx4n	Transmitter Inverted Data Input	36	Rx4n	Receiver Inverted Data Output
7	GND	Ground	37	GND	Ground
8	Tx6p	Transmitter Non-Inverted Data Input	38	Rx6p	Receiver Non-Inverted Data Output
9	Tx6n	Transmitter Inverted Data Input	39	Rx6n	Receiver Inverted Data Output
10	GND	Ground	40	GND	Ground
11	Tx8p	Transmitter Non-Inverted Data input	41	Rx8p	Receiver Non-Inverted Data Output
12	Tx8n	Transmitter Inverted Data Input	42	Rx8n	Receiver Inverted Data Output
13	GND	Ground	43	GND	Ground
14	SCL	2-wire serial interface clock	44	INT / RSTn	Module Interrupt / Module Reset
15	VCC	+3.3V Power	45	VCC	+3.3V Power
16	VCC	+3.3V Power	46	VCC	+3.3V Power

17	LPWn / PRSn	Low-Power Mode / Module Present	47	SDA	2-wire Serial interface data
18	GND	Ground	48	GND	Ground
19	Rx7n	Receiver Inverted Data Output	49	Tx7n	Transmitter Inverted Data Input
20	Rx7p	Receiver Non-Inverted Data Output	50	Tx7p	Transmitter Non-Inverted Data Input
21	GND	Ground	51	GND	Ground
22	Rx5n	Receiver Inverted Data Output	52	Tx5n	Transmitter Inverted Data Input
23	Rx5p	Receiver Non-Inverted Data Output	53	Tx5p	Transmitter Non-Inverted Data Input
24	GND	Ground	54	GND	Ground
25	Rx3n	Receiver Inverted Data Output	55	Tx3n	Transmitter Inverted Data Input
26	Rx3p	Receiver Non-Inverted Data Output	56	Tx3p	Transmitter Non-Inverted Data Input
27	GND	Ground	57	GND	Ground
28	Rx1n	Receiver Inverted Data Output	58	Tx1n	Transmitter Inverted Data Input
29	Rx1p	Receiver Non-Inverted Data Output	59	Tx1p	Transmitter Non-Inverted Data Input
30	GND	Ground	60	GND	Ground

OSFP Module Pad Layout

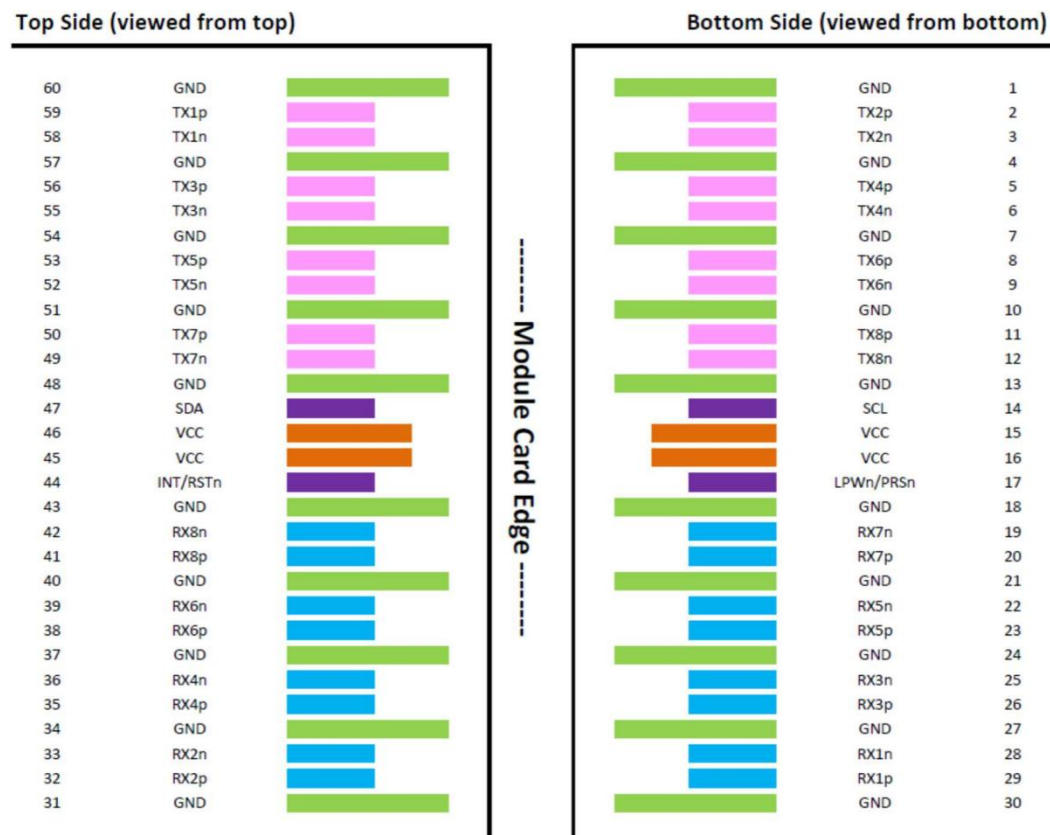


Figure 1 OSFP Module Pad Layout

Ordering Information

Table5-Ordering Information

OPN	Description
O40112-800G-ACA	0.5m Twin-port 800Gb/s OSFP Finned Top to 4x200Gb/s OSFP Flat Top Active Copper Cable
O40112-800G-AC1	1m Twin-port 800Gb/s OSFP Finned Top to 4x200Gb/s OSFP Flat Top Active Copper Cable
O40112-800G-AC2	2m Twin-port 800Gb/s OSFP Finned Top to 4x200Gb/s OSFP Flat Top Active Copper Cable
O40112-800G-AC3	3m Twin-port 800Gb/s OSFP Finned Top to 4x200Gb/s OSFP Flat Top Active Copper Cable
O40112-800G-AC4	4m Twin-port 800Gb/s OSFP Finned Top to 4x200Gb/s OSFP Flat Top Active Copper Cable
O40112-800G-AC5	5m Twin-port 800Gb/s OSFP Finned Top to 4x200Gb/s OSFP Flat Top Active Copper Cable

Mechanical Dimensions

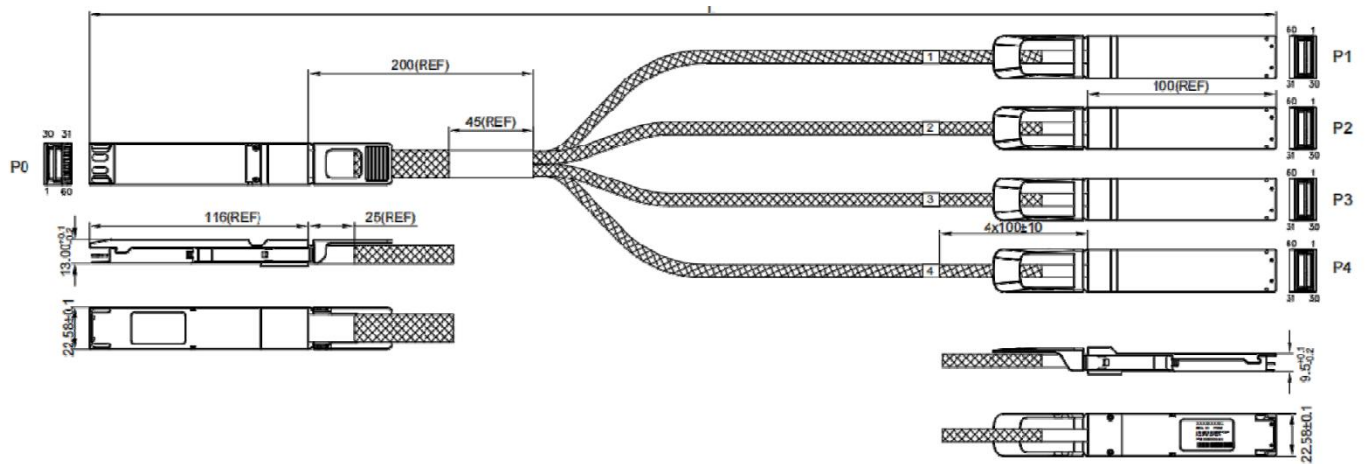


Figure 2 Mechanical Dimensions

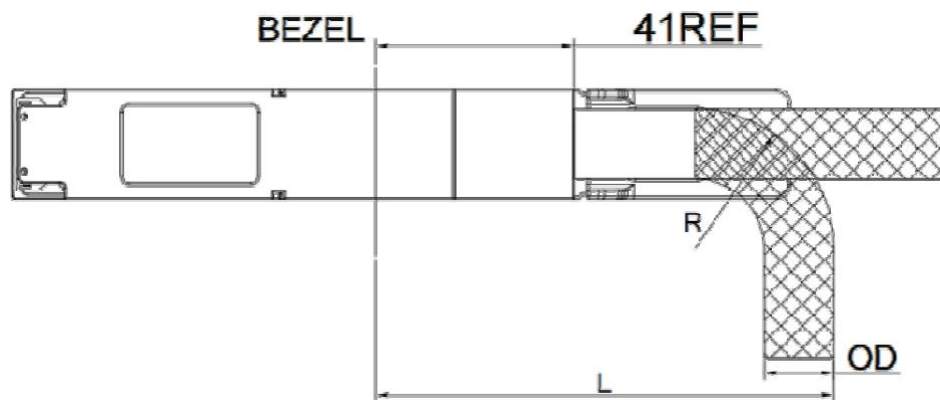


Figure 3 OSFP-IHS Bend Radius

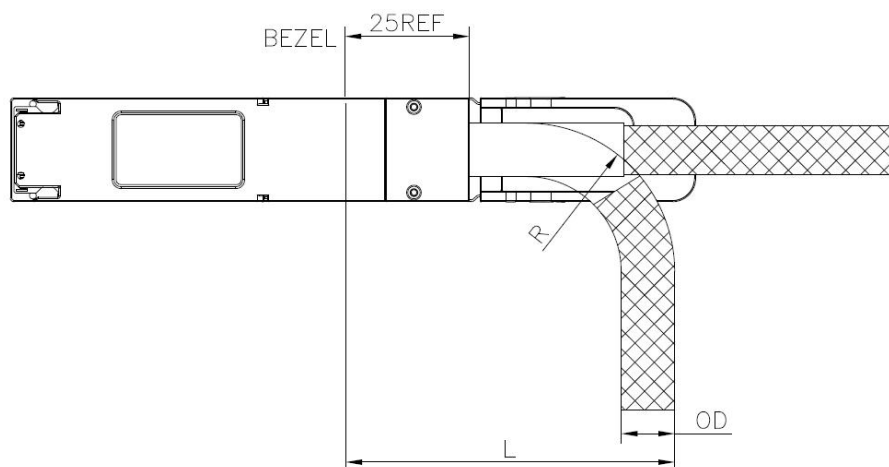


Figure 4 OSFP-RHS Bend Radius

Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. Neither NADDOD make any representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. NADDOD shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any material (defined below), code, or functionality.

NADDOD reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice. Customer should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

NADDOD makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by NADDOD. It is customer's sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product.

NADDOD products are sold subject to the NADDOD standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NADDOD and customer ("Terms of Sale"). NADDOD hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the NADDOD product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.



PNY Technologies Europe
9 rue Joseph Cugnot
33708 Mérignac cedex | France
T +33 (0)5 40 240 240 |
pnypro@pny.eu

I Further Information

Web www.naddod.com

Email For order requirements: sales@naddod.com

For other information: info@naddod.com

For cooperation: agency@naddod.com

For technical support: tech@naddod.com

For customer service: support@naddod.com

Disclaimer

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights