

# MP0-12 (Female) to MP0-12 (Female) Type B LSZH Single-mode Fiber Cable

## Features

- Flexible round outer jacket for easy installation
- Push-pull latching for quick release
- Female-to-Female connectors
- 9/125  $\mu\text{m}$  Single-mode fibers
- Telcordia GR-1435 compliant
- IEC Standard Connectors:  
MP0: IEC 61754-7 and ANSI/TIA/EIA 604-5-199
- OFNR/LSZH (low smoke zero halogen) jacket
- Supports InfiniBand, Ethernet protocols

## Applications

- Optical long-reach high speed links in data centers
- Data processing and storage systems

## Description

The S2MPOA12FB MPO-12/APC to MPO-12/APC passive optical single-mode cable, is designed for linking InfiniBand and Ethernet Single-mode twin-port OSFP and single-port OSFP and QSFP112 transceivers together.

The Multiple Push On, 12 fiber, Angled Polished Connectors (MPO-12/APC) uses 8 active fibers to transmit light, and 4 inactive fibers as strength members. The APC end has a 8-degree polished angle to deflect internal optical back reflections from entering the transceiver and distorting the signal quality.

Twin-port OSFP 800Gb/s transceivers support two 4-channel fibers which are linked to other twin-port OSFP, single port OSFP or QSFP112 400Gb/s transceivers.

The fibers are "crossover", Type-B cables that enable directly attaching two transceivers together and aligning the transmit laser fiber on pin 1 to "crosses over" and align with pin 12 of the opposite fiber end transceiver photodetector.

Typical usecase is linking twin port OSFP switches to each other, and to ConnectX-7® network adapters and/or BlueField-3® Data Processing Units (DPUs) in compute and storage servers.

Rigorous cable production testing ensures best out-of-the-box installation experience, performance, and durability. NADDOD optical solutions provide short, medium, and long reach scalability for all topologies, utilizing innovative optical technologies to enable high signal integrity and reliability.

## Absolute Maximum Specifications

Absolute maximum ratings are those beyond which damage to the device may occur.

Prolonged operation between the operational specifications and absolute maximum ratings is not intended and may cause permanent device degradation.

## Environmental Specifications

Table1-Environmental Specifications			
Parameter	Min	Max.	Units
Storage temperature	-40	85	°C
Operating temperature	0	70	°C
Humidity	10	85	%RH

## Mechanical and Optical Specifications

Table2-Mechanical and Optical Specifications			
Parameter	Note	Value	Units
Tolerance on length,	Length < 10 m	-0/+0.2	m
	Length ≥ 10 m	-0/+0.5	
Number of Fibers		12	
Cable diameter		3 ± 0.2	mm
Minimum bending radius	Anywhere on the cable	30	mm

Cable Jacket		Yellow, LSZH-OFNR	
Topology	Crossed	Type B	
Connectors and connector end face	Low loss MPO	APC, female	
Insertion Loss, connector end face, IL	L=length {m}	$\leq 0.35 + 0.0004 \times L$	dB
Return Loss, connector end face, RL		$\geq 60$	dB

## Interconnection Scheme

Table3-Interconnection Scheme		
MP01 MPO/APC Female	Connection	MP02 MPO/APC Female
1	----->	12
2	----->	11
3	----->	10
4	----->	9
5	Not Connected	8
6	Not Connected	7
7	Not Connected	6
8	Not Connected	5
9	<-----	4
10	<-----	3
11	<-----	2
12	<-----	1

## Application

The S2MPOA12FB Fiber Cable is intended for interconnection of 2 switch together or a OSFP switch to 2 network adapters. The cable mates with pluggable optical 400GbE/NDR transceivers twin port OSFP DR8 transceiver for InfiniBand and Ethernet systems in the switch end and OSFP-400G-DR4 or Q112-400G-DR4 in ConnectX-7 network adapters and BlueField-3 DPUs.

- Twin port OSFP transceivers must use the same fiber type in both MPO-12/APC ports (straight or 1:2 splitter) and cannot be mixed.
- Single-mode fibers use an industry standard yellow fiber jacket color
- Jacket is Low-Smoke, Zero-Halogen (LSZH) type to reduce toxic smoke in event of a fire.
- The connector has an green connector shell denoting MPO-12/APC.
- MPO-12/APC connectors cannot be used with MPO-12/UPC ultra-flat polish connectors because the fiber polish is different and cannot be matched.
- The cable can support OSFP, QSFP112 or QSFP-DD transceivers at the same time depending on the adapter type.

## Connector Details


The S2MPOA12FB fiber cables have 8 individual fibers, 4 in each direction. A positioning key together with the alignment pins define the fiber position numbering scheme.

The MPO connectors are the angle-polished (APC) type which provide minimal reflection of the optical signal for optimal signal integrity.




Transceivers have alignment pins for precise positioning of the cable connector against the optical beams. The fiber cable has alignment holes matching the transceiver's pins.

MPO Connector with Alignment Holes and Positioning Key:

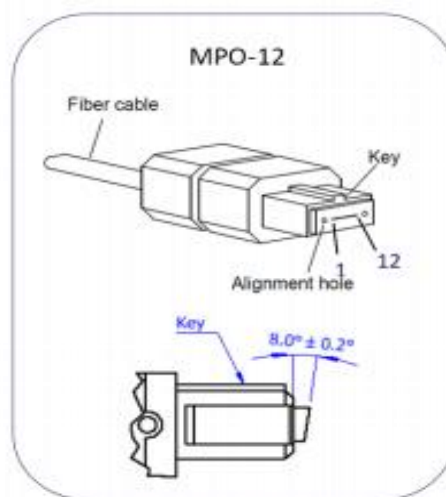

Optical Receptacle and Lane Assignment (transceiver, front view):

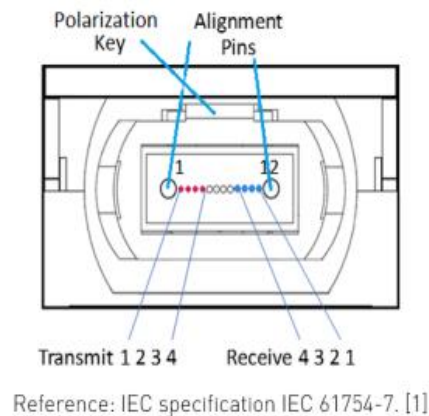

## Handling Precautions

The cable is shipped with dust caps which protect the connectors from contamination during shipment and installation. The caps should not be removed until the cable is plugged in at the time of installation. Prior to insertion of the fiber cable into the transceiver, always clean both the cable and the transceiver connector using optical connector cleaners to remove any contamination. Keep the cables away from any Liquids.

Fiber cables have no conductive parts and are not ESD sensitive. However, they plug into ESD sensitive transceivers. Due to that, standard ESD handling precautions must be observed during installation.

## Notice

This document is provided for information purposes only and shall not be regarded as a warranty of a certain functionality, condition, or quality of a product. Neither NADDOD make any representations or warranties, expressed or implied, as to the accuracy or completeness of the information contained in this document and assumes no responsibility for any errors contained herein. NADDOD shall have no liability for the consequences or use of such information or for any infringement of patents or other rights of third parties that may result from its use. This document is not a commitment to develop, release, or deliver any material (defined below), code, or functionality.

NADDOD reserves the right to make corrections, modifications, enhancements, improvements, and any other changes to this document, at any time without notice. Customer should obtain the latest relevant information before placing orders and should verify that such information is current and complete.

NADDOD makes no representation or warranty that products based on this document will be suitable for any specified use. Testing of all parameters of each product is not necessarily performed by NADDOD. It is customer's sole responsibility to evaluate and determine the applicability of any information contained in this document, ensure the product is suitable and fit for the application planned by customer, and perform the necessary testing for the application in order to avoid a default of the application or the product.

NADDOD products are sold subject to the NADDOD standard terms and conditions of sale supplied at the time of order acknowledgement, unless otherwise agreed in an individual sales agreement signed by authorized representatives of NADDOD and customer ("Terms of Sale"). NADDOD hereby expressly objects to applying any customer general terms and conditions with regards to the purchase of the NADDOD product referenced in this document. No contractual obligations are formed either directly or indirectly by this document.

## Further Information:

---

Web [www.naddod.com](http://www.naddod.com)

Email For order requirements: [sales@naddod.com](mailto:sales@naddod.com)  
For customer service: [support@naddod.com](mailto:support@naddod.com)  
For technical support: [tech@naddod.com](mailto:tech@naddod.com)

For cooperation: [agency@naddod.com](mailto:agency@naddod.com)

For other information: [info@naddod.com](mailto:info@naddod.com)

## Disclaimer

---

1. We are committed to continuous product improvement and feature upgrades, and the contents contained in this manual are subject to change without notice.
2. Nothing herein should be construed as constituting an additional warranty.
3. NADDOD assumes no responsibility for the use or reliability of equipment or software not provided by NADDOD.

Copyright © NADDOD.COM All Rights

The logo for PNY, featuring the letters 'PNY' in a stylized, bold, white font with a registered trademark symbol.

PNY Technologies Europe  
9 rue Joseph Cugnot  
33708 Mérignac cedex | France  
T +33 (0)5 40 240 240 |  
[pnypro@pny.eu](mailto:pnypro@pny.eu)

NADDOD - Building an Intelligent World with Everything Connected  
Accelerated AI Clusters | HPC Datacenter | Enterprise Networking