

Features

- Transmission data rate up to 25.78Gbps
- 850nm VCSEL laser
- PIN photo-detector
- Internal CDR on both transmitter and receiver channels
- Low power consumption < 1W
- Hot-pluggable SFP28 form factor
- Up to 70m on OM3 MMF and 100m on OM4 MMF
- Digital diagnostics functions are available (optional)
- Operating case temperature range: 0°C to +70°C



- 3.3V power supply voltage
- RoHS-6 compliant

Applications

- IEEE 802.3by 25GBASE-SR

1. Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit
Supply Voltage	Vcc	0	3.6	V
Storage Temperature	Ts	-40	+85	°C
Operating Humidity	-	5	85	%

2. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit
Operating Case Temperature (Commercial)	Tc	0		+70	°C
Power Supply Voltage	Vcc	3.13	3.3	3.47	V
Power Supply Current	Icc			300	mA

Fiber Length on 50/125µm high-bandwidth (OM3) MMF				70	m
Fiber Length on 50/125µm high-bandwidth (OM4) MMF				100	m

3. Optical and Electrical Characteristics

Parameter	Symbol	Min	Typical	Max	Unit
Transmitter					
Data rate	BR		25.78		Gbps
Centre Wavelength	λ_c	840	850	860	nm
Spectral Width (-20dB)	σ			0.6	nm
Average Output Power	Pavg	-8.4		2.4	dBm
Optical Power OMA	POMA	-6.4		3	dBm
Extinction Ratio	ER	2			dB
Differential data input swing	VIN,PP	40		1000	mV
Input Differential Impedance	ZIN	90	100	110	Ω
TX Disable	Disable	2.0		Vcc	V
	Enable	0		0.8	V
TX Fault	Fault	2.0		Vcc	V
	Normal	0		0.8	V
Receiver					
Data rate	BR		25.78		Gbps
Centre Wavelength	λ_c	840	850	860	nm
Receiver Sensitivity (OMA)	Psens	-	-	-10	dBm
Stressed Sensitivity (OMA)		-	-	-5.2	dBm
Receiver Power (OMA)				3	dBm
LOS De-Assert	LOSD			-13	dBm
LOS Assert	LOSA	-30			dBm
LOS Hysteresis		0.5			dB
Differential data output swing	Vout,PP	300		850	mV
LOS	High	2.0		Vcc	V
	Low			0.8	V

Note:

Receive Sensitivity measured with a prbs31 pattern @25.78125Gb/s, BER 1E-5;

4. Timing and Electrical


Parameter	Symbol	Min	Max	Unit	Conditions
Tx_Disable assert time	t_off		100	µs	Rising edge of Tx_Disable to fall of output signal below 10% normal
Tx_Disable negate time	t_on		2	ms	Falling edge of Tx_Disable to rise of output signal above 90% of normal. This only applies in normal operation, not during startup or fault recovery.
Time to initialize 2-wire interface	t_2w_start_up		300	ms	From power on or hot plug after the supply meeting table 8
Time to initialize	t_start_up		300	ms	From power supplies meeting table 8 or hot plug or Tx disable negated during power up, or Tx_Fault recovery, until non-cooled power level I part (or non-cooled power level II part already enabled at power level II for Tx_Fault recovery) is fully operational
Time to initialize cooled module and time to power up a cooled module to power level II	t_start_up_cooled		90	s	From power supplies meeting table 8 or hot plug or Tx disable negated during power up, or Tx_Fault recovery, until non-cooled power level I part (or non-cooled power level II part already enabled at power level II for Tx_Fault recovery) is fully operational. Also, from stop bit low-to-high SDA transition enabling power level II until cooled module is fully operational
Time to power up to level II	t_power_level2		300	ms	From stop bit low-to-high SDA transition enabling power level II until cooled module is fully operational
Tx_Fault assert	Tx_Fault_on		1	ms	from occurrence of fault to assertion of Tx-Fault
Tx_Fault assert for cooled module	Tx_Fault_on_cooled		50	ms	from occurrence of fault to assertion of Tx-Fault
Tx_Fault Reset	t_reset	10		µs	Time Tx_Disable must be held high to reset Tx_Fault
RS0, RS1 rate select timing for FC	t_RS0_FC, t_RS1_FC		500	µs	from assertion to stable output
RS0, RS1 rate select timing for non FC	t_RS0, t_RS1		24	ms	from assertion to stable output

Rx_LOS assert delay	t_los_on		100	µs	From occurrence of loss of signal to assertion of Rx_LOS
Rx_LOS negate delay	t_los_off		100	µs	From occurrence of presence of signal to assertion of Rx_LOS

5. Diagnostics

Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70	°C	±3°C	Internal / External
Voltage	3.0 to 3.6	V	±3%	Internal / External
Bias Current	0 to 20	mA	±10%	Internal / External
TX Power	-8 to 3	dBm	±3dB	Internal / External
RX Power	-14 to 0	dBm	±3dB	Internal / External

6. Mechanical Diagram

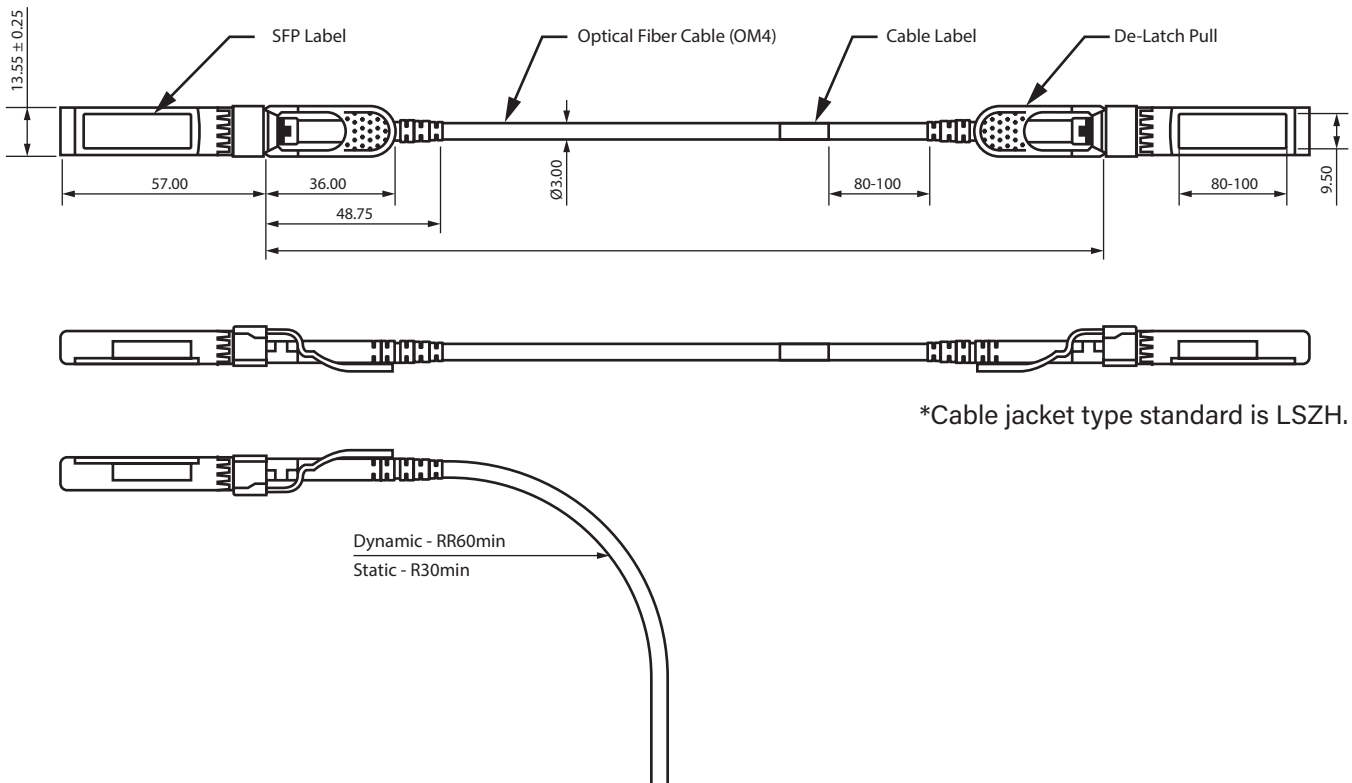

Note: External physical characteristics are subject to variation. This may include, but is not limited to, external case designs, pull tab colors and/or shapes, removal latch styles or colors, and label sizes and placement. These variations do not affect the function or characteristics of the transceivers.

7. Ordering Information

PNY P/N	Mellanox Legacy P/N	Nvidia P/N	Product Description
PFA2P10-A003	MFA2P10-A003	980-9IA1T-00A003	100% Mellanox Compatible active optical cable 25GbE, SFP28, 3m 5 Year Warranty
PFA2P10-A003-10	MFA2P10-A003	980-9IA1T-00A003	100% Mellanox Compatible active optical cable 25GbE, SFP28, 3m 10 Year Warranty
PFA2P10-A005	MFA2P10-A005	980-9I53W-00A005	100% Mellanox Compatible active optical cable 25GbE, SFP28, 5m 5 Year Warranty
PFA2P10-A005-10	MFA2P10-A005	980-9I53W-00A005	100% Mellanox Compatible active optical cable 25GbE, SFP28, 5m 10 Year Warranty
PFA2P10-A007	MFA2P10-A007	980-9I53Z-00A007	100% Mellanox Compatible active optical cable 25GbE, SFP28, 7m 5 Year Warranty
PFA2P10-A007-10	MFA2P10-A007	980-9I53Z-00A007	100% Mellanox Compatible active optical cable 25GbE, SFP28, 7m 10 Year Warranty
PFA2P10-A010	MFA2P10-A010	980-9I532-00A010	100% Mellanox Compatible active optical cable 25GbE, SFP28, 10m 5 Year Warranty
PFA2P10-A010-10	MFA2P10-A010	980-9I532-00A010	100% Mellanox Compatible active optical cable 25GbE, SFP28, 10m 10 Year Warranty
PFA2P10-A015	MFA2P10-A015	980-9I535-00A015	100% Mellanox Compatible active optical cable 25GbE, SFP28, 15m 5 Year Warranty
PFA2P10-A015-10	MFA2P10-A015	980-9I535-00A015	100% Mellanox Compatible active optical cable 25GbE, SFP28, 15m 10 Year Warranty
PFA2P10-A020	MFA2P10-A020	980-9I536-00A020	100% Mellanox Compatible active optical cable 25GbE, SFP28, 20m 5 Year Warranty
PFA2P10-A020-10	MFA2P10-A020	980-9I536-00A020	100% Mellanox Compatible active optical cable 25GbE, SFP28, 20m 10 Year Warranty
PFA2P10-A030	MFA2P10-A030	980-9I539-00A030	100% Mellanox Compatible active optical cable 25GbE, SFP28, 30m 5 Year Warranty
PFA2P10-A030-10	MFA2P10-A030	980-9I539-00A030	100% Mellanox Compatible active optical cable 25GbE, SFP28, 30m 10 Year Warranty

8. Contact Information

gopny@pny.com